




Installation Instructions for Inground Vinyl Pools

PRODUCT

266020 - BriteStream Inground Vinyl Pools Mounting Kit.





This mounting Kit is used for fitting the following Underwater LED Lights:

- 264300 B/STREAM UWL 8-LED WHITE 12M
- 264305 B/STREAM UWL 8-LED WHITE 20M
- 264306 B/STREAM UWL 8-LED BLUE 12M
- 264307 B/STREAM UWL 8-LED BLUE 20M
- 264502 B/STREAM UWL 8-LED RGB 12M
- 264503 B/STREAM UWL 8-LED RGB 20M

FEATURES

- New Mounting Kit to fit inground vinyl pools
- Ideal for inground vinyl liner pools
- Available in White

DIMENSIONS

- Rim OD 226mm
- Width 84mm (Kit fitted with Light)

PRODUCT LITERATURE

For more information on the BriteStream LED Light, please refer to the Waterco Product Information Bulletin No PG32 – BriteStream LED Light.

WARRANTY


This unit is covered by a 12 month warranty against faulty materials and workmanship. Please refer to the detailed warranty booklet provided.

DISCLAIMER

Waterco takes no responsibility for Underwater Lights that are installed incorrectly or used beyond its intended purpose and specification.

Waterco has a policy of continuous research and development and reserves the right to amend without notice the specification and design of its products.

UWL Mounting Kit for Britestream Inground Vinyl Pools Code No. 266020

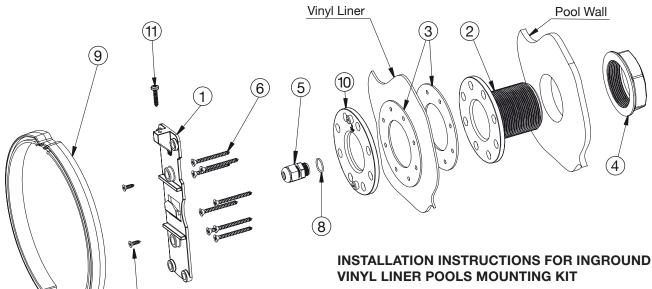

of coping.

ITEM	QTY	PART NO.	DESCRIPTION
1	1	650020	MOUNTING BRACKET
2	1	650010	FIXTURE UWL W POOLS
3	2	650012	GASKET
4	1	AC662	BACK NUT
5	1	650152	CABLE GLAND
6	8	6340823	CSK SCREW 8G X 50MM
7	2	6340822	CSK SCREW 6G X 13
8	1	650153	O RING 15 X 1.5
9	1	650097	DRESS RING 18MM
10	1	650011	FACE PLATE
11	1	65014	S/S SCREW 10G X 5/8

- a) Using 60mm holesaw cut hole in pool wall at 550mm below top
- b) Insert Fixture UWL Pools (Item 2) into cut hole in the pool wall and tighten firmly with Back Nut (Item 4) but without applying undue force. Ensure that two bosses on the Face Plate (Item 10) will align vertically when mounted on to Fixture (Item 2).
- c) Remove adhesive protecting overlay from the rubber Gasket (Item 3) and affix to the face of the Mounting Fixture (Item 2) and ensure that 8 holes in the Gasket and in Mounting Fixture are aligned.
- d) After fitting Vinyl Liner into pool walls find and mark screw centre holes for attaching Face Plate.
- e) Remove adhesive protective overlay from second rubber Gasket (Item 3) and affix on to the back of the Face Plate (Item 10) with all holes aligned.
- f) Apply a thin layer of silicone adhesive to the other side of the rubber Gasket then align with marked screw centres and affix to the vinyl liner. Apply silicone adhesive on screw thread then screw it in to the pool wall.
- g) Feed cord through the Cable Gland (Item 5) leaving enough cord length for servicing and tighten gland nut by hand.
- h) Attach Mounting Bracket on to two bosses on Mounting Fixture and secure it with two supplied countersunk screws.
- i) Wind cord loosely around back of the light and catch it in clips.
- j) Fit light to Mounting Bracket by sliding the light down the wall until clip and hook engage. Fix light with screw at the top to Mounting Bracket.

WATERCO

Waterco Limited ABN 62 002 070 733 OFFICES - AUSTRALIA

NSW - Sydney (HEAD OFFICE) Tel: +61 2 9898 8600 VIC/ TAS - Melbourne

Tel: +61 3 9764 1211 WA - Perth

Tel: +61 8 9273 1900

QLD - Brisbane Tel: +61 7 3299 9900

SA/ NT - Adelaide Tel : +61 8 8244 6000

ACT Distributor Tel: +61 2 6280 6476

OFFICES - OVERSEAS

Waterco USA Augusta, USA Tel: +1 706 793 7291 Waterco Canada St-Hyacinthe, QC, Canada Tel: +1 450 796 1421

Waterco (Europe) Limited Sittingbourne, Kent. UK Tel: +44(0) 1795 521 733 Waterco (NZ) Limited Auckland, New Zealand Tel: +64 9 525 7570

Waterco (C) Limited Guangzhou, China Tel: +8620 3222 2180

Waterco (Far East) Sdn. Bhd. Selangor, Malaysia Tel: +60 3 6145 6000 PT Waterco Indonesia Jakarta, Indonesia Tel: +62 21 4585 1481 Waterco International Pte Ltd

Tel: +65 6344 2378

Singapora